


505A

Worldwide Release Date: 10/21/09

MANUFACTURER'S INTENT

The second launch in the 5 series, the 505A, was designed to be more angular at the breakpoint. If the 715A was too aggressive on the lane patterns you bowl on, then the 505A will be a great choice. Each new ball from Track will include a microfiber cleaning pouch with instructions on its use.

- | | | |
|-----------|------------------------|---|
| 5 | MID PERFORMANCE | All "new" MP Gen 3 Reactive™ Pearl Coverstock w/ Performance Additive |
| 05 | CORE STRENGTH | (HorsePower) Indicates how strong the core potential is. 05=.005 Intermediate Differential. |
| A | ANGULAR | Angular at the Breaking Point. |

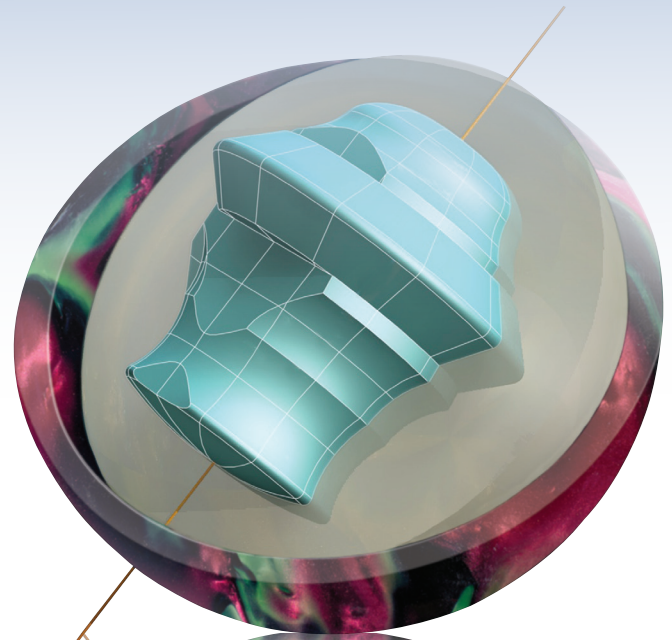


How may we help you bowl better?
Our support line is ready with trained professionals to assist you.
Visit www.trackbowling.com Monday-Friday from 2-7 pm CST, and click the Live Customer Support link to open a chat window for technical support questions. Or call us toll free at 1-800-837-1106.

Available from Track Distributors Worldwide. Track Bowling, P.O. Box 746 Hopkinsville, KY 42241-0746. www.trackbowling.com 800.837.1106

500 SERIES MID PERFORMANCE



505A The second launch in the 5 series, the 505A, was designed to be more angular at the breakpoint. We have taken the MP GEN3 coverstock and added an all new performance pearl additive for a more aggressive angle to the pocket. If the 715A was too aggressive on the lane patterns you bowl on, then the 505A will be a great choice. The horsepower of the core at .05 gives this ball great length. With the added performance in the coverstock, the bowler will get the extra hitting power they have come to expect from the Track line.

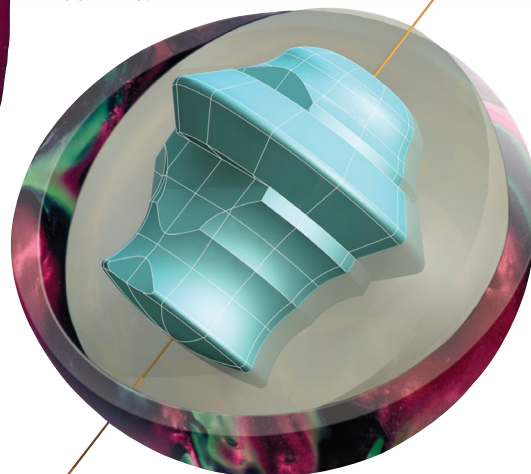

5 MID PERFORMANCE
05 CORE STRENGTH / INTERMEDIATE DIFF
A ANGULAR

STYLE	029744-1266XX		
COLOR	BLACK / RED / GREEN		
REACTION	ANGULAR AT THE BREAKPOINT		
COVERSTOCK	MP GEN3 REACTIVE™ PEARL W/PERFORMANCE ADDITIVE		
FINISH	2000 ABRALON® / POLISHED WITH POWERHOUSE FACTORY FINISH		
CORE	SHUTTLE		
WEIGHTS	12-16 LBS.		
CORE TYPE	ASYMMETRICAL		
INTER. DIFFERENCE	0.005		
LANE CONDITION	MEDIUM / MEDIUM LIGHT		
RG	#16/2.49	#15/2.48	#14/2.46
DIFFERENTIAL	#16/.040	#15/.040	#14/.046

