

Information Sheet


Impact Zone

Part Number

60-102846

Specifications

16# - 3 part design, with a 2 component compound core
15# - 4 component design, with a 3 part multi density core
14#-12# 4 - part design, with a 3 component compound core
Reactive Urethane Cover Stock
Burgundy Sparkle Polished finish
Hook Potential: 18.5 - 10.5 (dull/shiny)
Typical Length: 4.5
Typical Backend: 11
RG Maximum: 2.620"
RG Minimum: 2.573"
RG Differential: 0.047"
Average RG: 5.6
Track Flare Potential: 9.2

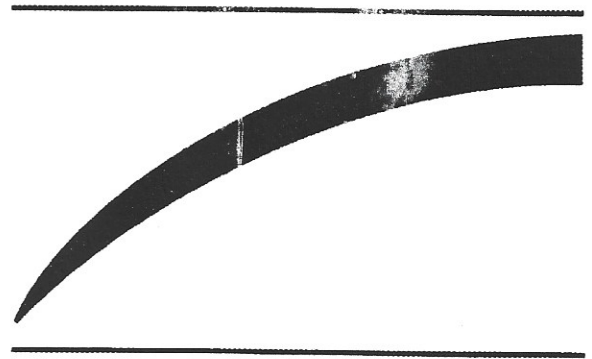


ZONE

Reaction Characteristics

Brunswick is pleased to introduce **Impact Zone™**, an all new addition to the most popular and best selling reactive ball line in the world. The Impact Zone uses an all-new core system and features an exclusive urethane formulation developed by Bayer Laboratories that produces the highest RG/high flare reactive ball that Brunswick has ever developed. The Higher RG creates a reaction that provides a smooth and straight front and mid-lane trajectory with the strongest backend available from any reactive ball.

Drilling Information

All weights of the **Impact Zone™** can be drilled using the techniques developed for two-piece balls. See Brunswick's "Seven Popular Layouts" for detailed drilling information.

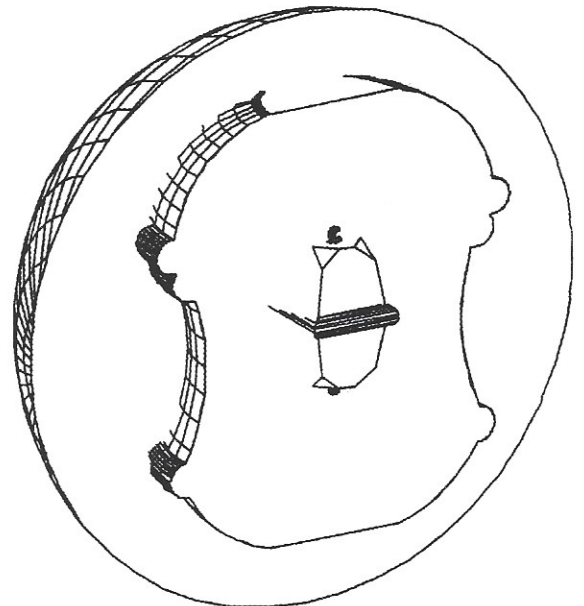

www.brunswickbowling.com