



©2009 Brunswick Bowling & Billiards Corporation. Form #0909-26B

C·ing is believing. The C·(System) 3.5™, the next generation of Carmen Salvino's exclusive Chemical Friction Technology, has a high friction factor, creating quicker response time, improved down lane traction and increased overall hook. To discover it for yourself, visit your local pro shop or brunswickbowling.com.

Brunswick® 

C•(SYSTEM)[™] 3.5

CHEMICAL FRICTION TECHNOLOGY COVERSTOCK

CFT 3.5 is the next evolution in Chemical Friction Technology. The CFT 3.5 coverstock has a higher friction factor than the original CFT 2.5, which quickens the response time, improves down lane traction and increases the overall hook.

I-BLOCK CORE

The proven two-component asymmetrical I-Block core enhances the CFT 3.5 coverstock to create maximum forgiveness, strong entry angles and versatile drilling layouts.

BALL MOTION

With its 4,000-grit micro pad finish, the C•(System) 3.5 offers a higher friction factor and increased response time to friction alternative than the original C•(System) 2.5. The new C•(System) 3.5 is best used on medium-oily to oily lane conditions when a quicker response motion is needed to increase entry angle to the pocket.

REACTION SETUP

The C•(System) 3.5 can be drilled using the standard drilling techniques developed for asymmetric bowling balls. Please visit brunswickbowling.com/drilling_information to view the drilling instructions for specific reaction characteristics and layout details.

LIGHTWEIGHT ENGINEERING

The unique core shape of each Brunswick ball is used for weights from 14 to 16 pounds. This approach to lightweight ball engineering provides bowlers with consistent ball reaction characteristics across this weight range. The same drilling instructions can be used for 12- and 13-pound balls. This is because Brunswick uses a generic core shape with an RG differential that is close enough to the 14-16 pound shape.



16 LB



15 LB



14 LB



13 LB




12 LB

RG-MAX	2.570	2.585	2.604	2.632	2.655
RG-INT	2.553	2.568	2.587	2.621	2.644
RG-MIN	2.520	2.535	2.554	2.589	2.612
RG-DIFF	0.050	0.050	0.050	0.043	0.043
RG-ASY	0.017	0.017	0.017	0.011	0.011

CFT[™]

Chemical Friction Technology

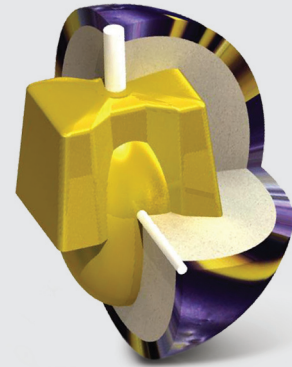

SPECIFICATIONS

Hook Potential	Low(10)	170	High(175)
Length	Early(25)	100	Long(235)
Breakpoint Shape	Smooth Arc(10)	95	Angular(100)
RG Differential	Low(0)	.050	High(.060)
RG Average	Center Heavy(1)	4.4	Cover Heavy(10)

- I-Block Core
- CFT 3.5 Reactive
- 2-Color Pearl, Purple / Yellow
- Hardness: 75-76
- 4,000-Grit Micro Pad Finish
- Chart Position: S-2
- Part No. 60-105254-93X



C•(System)_{3.5}

Brunswick[®]
brunswickbowling.com