

DV8 MISFIT VIOLET / WHITE PEARL

ELP
Entry level performance

Class 1 Reactive

The Class 1 Reactive coverstock creates easy length through the heads preserving axis rotation in the mid-lane for strong backend.

CORE

The **Misfit** core incorporates unique geometry that creates stability while the core is revving all the way to the backend and through the pins for improved pin action.

BALL MOTION


Finished with a High Gloss Polish, the **Misfit** skids very easily through the front part of the lane to the breakpoint before changing directions for a strong continuous backend that cuts through the pins on medium dry to medium oily lane conditions.

Reaction Setup

The **Misfit** can be drilled using the standard drilling techniques developed for symmetric bowling balls.

Lightweight Engineering


At DV8, the unique core shape of each individual ball is used for weights from 12 to 16 pounds. This approach to lightweight ball engineering provides bowlers with consistent ball reaction characteristics across this weight range.

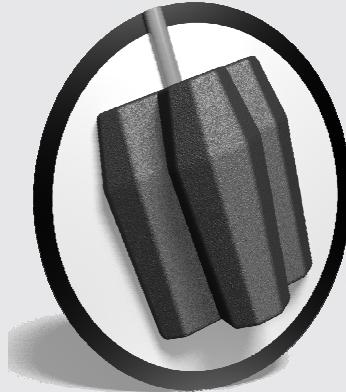

SPECIFICATIONS

| | | | |
|------------------|------------------|---|-------------------|
| Hook Potential | Low (10) | <div style="width: 110px; height: 10px; background-color: #808080; border: 1px solid black;"></div> | High (200) |
| Length | Early (25) | <div style="width: 120px; height: 10px; background-color: #808080; border: 1px solid black;"></div> | Long (235) |
| Breakpoint Shape | Smooth Arc (10) | <div style="width: 90px; height: 10px; background-color: #808080; border: 1px solid black;"></div> | Angular (100) |
| RG Differential | Low (0) | <div style="width: 40px; height: 10px; background-color: #808080; border: 1px solid black;"></div> | High (.060) |
| RG Average | Center Heavy (1) | <div style="width: 41px; height: 10px; background-color: #808080; border: 1px solid black;"></div> | Center Heavy (10) |

- Misfit Core
- Class 1 Reactive Coverstock
- 2-Color, Violet/White Pearl
- Hardness: 75-76
- 500 Siaair Micro Pad; Rough Buff; High Gloss Finish
- Part No. 60-105457-93X

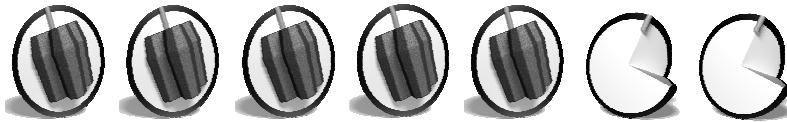

| | 16 LB | 15 LB | 14 LB | 13 LB | 12 LB | 11 LB | 10 LB |
|---------|-------|-------|-------|-------|-------|-------|-------|
| RG-MAX | 2.557 | 2.552 | 2.568 | 2.613 | 2.611 | 2.771 | 2.802 |
| RG-INT | 2.556 | 2.551 | 2.567 | 2.612 | 2.610 | 2.770 | 2.802 |
| RG-MIN | 2.522 | 2.512 | 2.528 | 2.581 | 2.571 | 2.769 | 2.800 |
| RG-DIFF | 0.035 | 0.040 | 0.040 | 0.032 | 0.040 | 0.002 | 0.002 |
| RG-ASY | 0.001 | 0.001 | 0.001 | 0.001 | 0.001 | 0.001 | 0.001 |



MAINTAIN YOUR BALL REACTION

Brunswick recommends the following procedures to maintain and restore the reaction characteristics of your Brunswick bowling balls:

1. Clean your Brunswick ball with **Brunswick Remove All** or similar ball cleaner after every use to reduce oil absorption.

2. If you think your Brunswick ball has lost some of its "out of the box" reaction, restore the ball to its original factory finish listed on the product information sheet. This is especially important for balls that are highly sanded or polished. Sand to 400-grit then use **Factory Finish High Gloss Polish** by **Brunswick** to restore the original factory finish on high gloss polish balls. Sand to 220-grit then use **Factory Finish Rough Buff** by **Brunswick** to restore the original factory finish on rough buff balls. For dull balls, wet sand with the Micro Pad grit listed on the product information sheet.

3. If there is a visible track on your ball, have your pro shop use a Haus or similar resurfacing machine to remove the track then restore the ball to its original factory finish. This service is available, for a fee, at many pro shops.

4. If your ball has more than 50 games on it, you may be able to increase mid-lane and back-end hooking action by removing oil from the coverstock. Remove the oil from the ball by gently warming it with either the **Revlvor** or **Rejuvenator** pro shop devices that have been designed for this purpose. The service is available, for a fee, at many pro shops. Brunswick testing has shown that by combining the restoration of the factory finish, resurfacing of the track and oil removal, your Brunswick ball can maintain its original "out of the box" reaction for hundreds of games. **Do not use a home oven to remove oil.** Temperatures cannot be adequately controlled and the ball may crack.

5. Absorbent materials sold by other bowling ball manufacturers to remove oil can also be used on Brunswick bowling balls. Information to date seems to indicate that absorbent materials have a more limited ability to remove oil than warming. You may be disappointed with results on heavily oil soaked balls.

NOTE: Oil soaked balls tend to traction less in the oil and respond less to the dry boards on the lane. If you are matching-up using an oil soaked ball on wet/dry or broken down lane conditions, removing the oil from the ball will significantly change your match-up and possibly create undesirable over reactions.

For the most up-to-date product line information visit www.bowlwithbrunswick.com/balls.

