

**Part Number**

60-104112-93X

Coverstock

PowrKoil 22 - Reactive

Color: Blue Solid / Orange Solid

Hardness: 76-78

Factory Finish

400-grit wet sand

Core Dynamics

RG Max: 2.620

RG Min: 2.573

RG Diff: 0.047

Average RG: 5.6

Performance

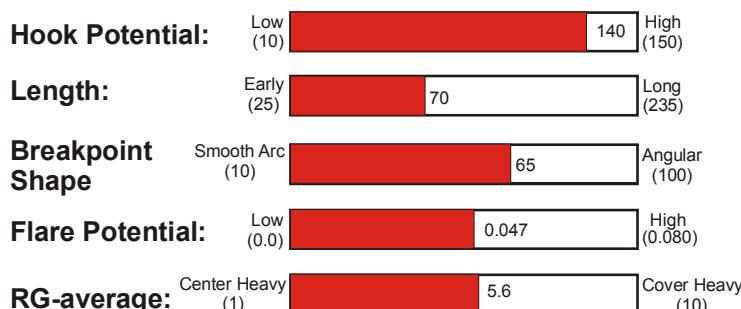
Hook Potential: 140

Length: 70

Typical Breakpoint: 65

Available Weights

12-16 Pounds

**Reaction Characteristics – Explosion Zone's**

The Brunswick International Series is designed to match-up to typically more difficult International lane conditions and is available only through International distributors.

The **Explosion Zone 1 & 2** utilize Symmetric core technologies, and two different types of Reactive coverstocks to create a complementary pair of ball reactions that will allow bowlers to match-up to lane conditions ranging from medium-dry to oily.

The **Explosion Zone 1** combines a Low-RG Symmetric Core with SS Reactive, our latest, Skid/Snap, High Gloss Reactive coverstock. This core/coverstock combination creates a skid/snap reaction that matches up on medium-dry to medium-oily lane conditions, shorter patterns or broken down lane conditions. Bowlers with slower ball speeds or any bowler who has problems with the ball hooking early should appreciate the ball reaction of the **Explosion Zone 1**.

The **Explosion Zone 2** uses the highest RG Symmetrical Core System ever used in the International Zone Series. Combined with a non-pearlized, two-color PowerKoil 22 coverstock. This core/coverstock combination creates a large hook potential, even arcing reaction that matches up on medium to oily lane conditions and longer patterns. Bowlers with faster ball speeds or any bowler who has problems with the ball going too long before hooking should appreciate the ball reaction of the **Explosion Zone 2**.

Utility – Explosion Zone 2

- Out of the Box:** With its dull 400-grit wet sand surface the **Explosion Zone 2** matches up well on medium to oily lane conditions.

- When shined:** Using Brunswick's **Factory Finish High Gloss Polish**, the total hooking action of the **Explosion Zone 2** can be reduced and the arc made more skid/snap

Reaction Setup – Explosion Zone 2

The **Explosion Zone 2** can be drilled using the standard drilling techniques developed for two-piece balls. See the included drilling instructions for reaction characteristics and layout details.

The **Explosion Zone 2** is finished with a dull 400-grit surface finish which increases its hooking action in the oil. Dull surface finishes can sometimes hook too early resulting in reduced backend reaction and hitting power. To increase length, polish the surface with Brunswick's **Factory Finish High Gloss Polish**.