

Information Sheet

Quantum Entry Reactive - Blue Pearl / Ivory

Part Number

60-104794-93X

Coverstock

Reactive

Color: Blue Pearl / Ivory

Hardness: 76-78

Factory Finish

High Gloss Polish

Core Dynamics

RG Max: 2.704

RG Min: 2.663

RG Diff: 0.041

RG Avg: 8.0

Performance

Hook Potential: 70

Length: 155


Breakpoint Shape: 75

Available Weights

10-15 Pounds

(10-11 use a spherical offset core, no riser pin)

Quantum Entry

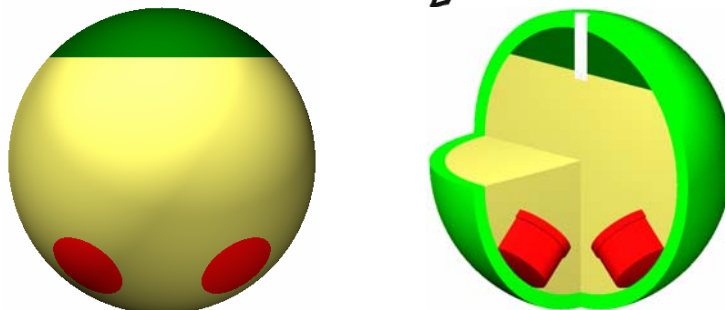

Reaction Characteristics

Ready to start hooking the ball? Move up from Plastic to Reactive coverstock technology. Compared to Plastic, Reactive coverstock technology increases traction and hooking action in the oil, and Reactive coverstocks can be sanded or shined to create large differences in hook potential. Reactive coverstocks also respond more aggressively to dry lane surfaces than Urethane coverstocks, increasing backend hooking action and hitting power.

Core: The Quantum Entry Blue Pearl / Ivory uses DISC (Differential Increasing Side Cylinders) core technology which provides:

- The largest track flare potential of any ball in its class
- Consistent track flare potentials at all weights from 12-15 pounds
- Larger, more consistent pin-out distances at all weights from 12-15 pounds
- A more driller friendly design. The precise geometric placement of high density side cylinders maximizes the increase in Track Flare Potential while maintaining symmetry for easy drilling.

Reaction Setup

Your Quantum Entry Blue Pearl / Ivory can be drilled using the standard drilling techniques developed for two-piece balls, see the included drilling instructions for reaction characteristics and layout details.

Your Quantum Entry Blue Pearl / Ivory is finished with a high gloss surface which enhances its appearance **and** reduces hooking action in the oil. High gloss finishes can sometimes cause over/under reactions, too little hooking action in the oil, then too much hooking action off the dry, which can be hard to control. To increase hooking action and smooth out the ball reaction dull the surface, first with a fine 800-1000 grit abrasive. If more hooking action and a smoother reaction is desired dull the surface of the ball with a coarse 320-400 grit abrasive.