



# SYNERGY

The Track SYNERGY™ drilling instructions utilize the bowler's Axis Tilt and some of the most common league Lane Conditions to determine the most desirable drill pattern for the bowler. Use the chart below to match the bowler's style with the lane conditions they most often play on. After the desired drill pattern is established, find the pattern inside this sheet and follow both the written and pictured directions to generate the correct drilling.

## PLAYER'S STYLE:



0° AXIS TILT

45° AXIS TILT

90° AXIS TILT

(FORWARD ROLL)

(MEDIUM SIDE ROLL)

(MAXIMUM SIDE ROLL)

LANE CONDITIONS:

HEADS ..... HEAVY OIL

BACKENDS .... DRY

SEE DRILLING # 5

SEE DRILLING # 6

SEE DRILLING # 7

HEADS ..... MEDIUM OIL

BACKENDS .... AVERAGE  
CARRYDOWN

SEE DRILLING # 3

SEE DRILLING # 4

SEE DRILLING # 5

HEADS ..... DRY

BACKENDS .... HEAVY  
CARRYDOWN

SEE DRILLING # 1

SEE DRILLING # 2

SEE DRILLING # 3

WET / DRY

DRILLING # 4 WITH  
NEGATIVE SIDE WT.  
OR DRILLING # 5


DRILLING # 5 WITH  
NEGATIVE SIDE WT.  
OR DRILLING # 6

DRILLING # 7

Be Sure to See  
Back Page for  
Important Reminders!

## IMPORTANT REMINDERS

- DO NOT DRILL BALANCE HOLES DEEPER THAN 2-3/4 INCHES!
- If the bowler's horizontal axis point is further than 5-3/4 inches, place extra-hole 1-1/2 inches (instead of 2 inches) beyond the bowler's positive axis on drillings 5 & 7.
- Adjust the surface of the ball to fine tune ball reaction after drilling. *Sanding* the ball will increase hookability as well as induce earlier roll. If the ball is sanded or worn from play, *polishing* the ball will reduce hookability but allow the ball to hook sharper on the backend of the lane.

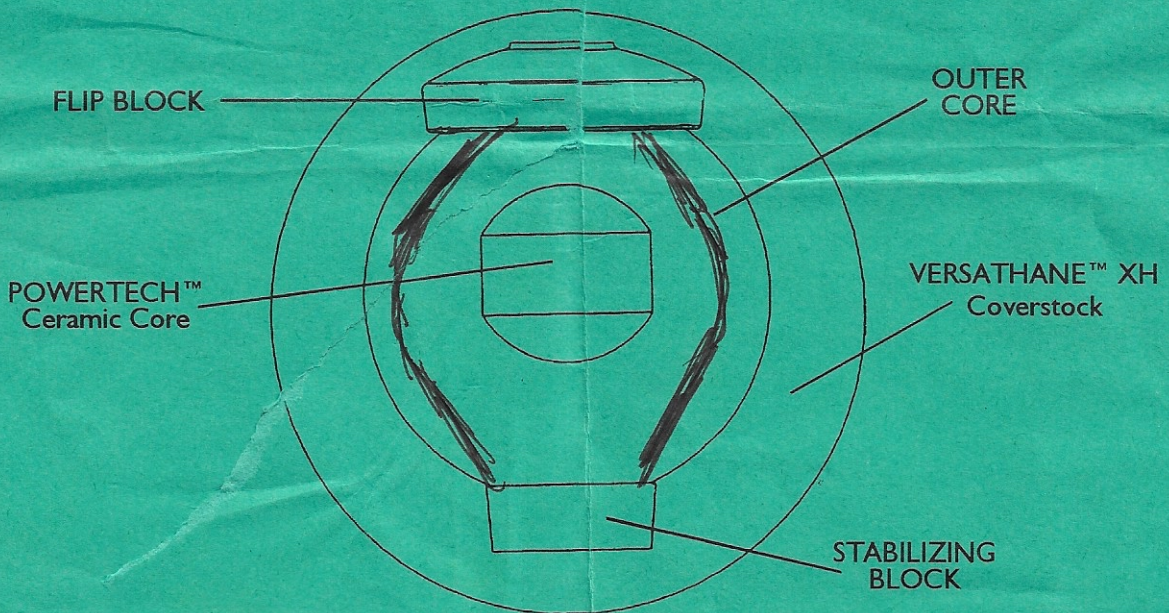

The New Bowling Technology.™

Track, Inc., 4837 West Avenue · San Antonio · Texas · 78213  
1-800-837-1106