

C-(SYSTEM)™ MAXXED-OUT

HP
High performance

CFT MAXXED-OUT SOLID COVERSTOCK

CFT maxxed-out Solid is our latest innovation in Chemical Friction Technology. The CFT maxxed-out solid coverstock maximizes the friction additives to strengthen its grip in the mid-lane and backend for maximum control. The CFT maxxed-out solid coverstock still provides enhanced projection down the lane saving axis rotation for more energy on the backend and through the pins.

CORE

The new **Ultra Low Dual Flip I – Block symmetrical** core incorporates a top and bottom flip block over a centered mass. The centered mass creates stability while the dual flip blocks keep the core revving to the backend all the way through the pins for improved pin action.

BALL MOTION

With its 4000 grit Siaair Micro Pad finish, the **C-(System) maxxed-out** skids easily through the front, saving axis rotation for the backend with a strong continuous breakpoint. The **C-(System) maxxed-out** is best used on fresh and wet/dry lane conditions where control is needed on medium-oily to oily lane patterns.

Reaction Setup

The **C-(System) maxxed-out** can be drilled using the standard drilling techniques developed for symmetric bowling balls.

Lightweight Engineering

At Brunswick, the unique core shape of each individual ball is used for weights from 14 to 16 pounds. This approach to lightweight ball engineering provides bowlers with consistent ball reaction characteristics across this weight range. At 12 and 13 pounds, Brunswick uses a generic core shape with a RG-differential that is close enough to the 14 to 16 pound shape so the same drilling instructions can be used.




	16 LB	15 LB	14 LB	13 LB	12 LB
RG-MAX	2.523	2.535	2.551	2.614	2.637
RG-MIN	2.468	2.480	2.496	2.574	2.597
RG-DIFF	0.055	0.055	0.055	0.040	0.040



SPECIFICATIONS

Hook Potential	Low (10)	<div style="width: 170px;"><div style="width: 10px; background-color: #800000;"></div></div>	170	High (200)
Length	Early (25)	<div style="width: 110px;"><div style="width: 10px; background-color: #800000;"></div></div>	110	Long (235)
Breakpoint Shape	Smooth Arc (10)	<div style="width: 85px;"><div style="width: 10px; background-color: #800000;"></div></div>	85	Angular (105)
RG Differential	Low (0)	<div style="width: 55px;"><div style="width: 10px; background-color: #800000;"></div></div>	.055	High (.060)
RG Average	Center Heavy (1)	<div style="width: 31px;"><div style="width: 10px; background-color: #800000;"></div></div>	3.1	Center Heavy (10)

- Ultra Low Dual Flip I – Block Symmetric Core
- CFT Maxxed-Out Solid Coverstock
- 2-Color, Cobalt and Teal Solid
- Hardness: 73-75
- 500; 2,000 & 4,000 Siaair Micro Pad Finish
- Chart Position: T-10
- Part No. 60-105469-93X

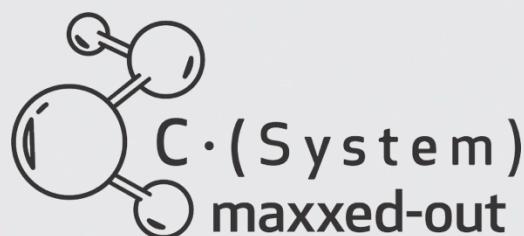

Brunswick®
BowlwithBrunswick.com

MAINTAIN YOUR BALL REACTION

Brunswick recommends the following procedures to maintain and restore the reaction characteristics of your Brunswick bowling balls:

1. Clean your Brunswick ball with **Brunswick Remove All** or similar ball cleaner after every use to reduce oil absorption.

2. If you think your Brunswick ball has lost some of its "out of the box" reaction, restore the ball to its original factory finish listed on the product information sheet. This is especially important for balls that are highly sanded or polished. Sand to 400-grit then use **Factory Finish High Gloss Polish by Brunswick** to restore the original factory finish on high gloss polish balls. Sand to 220-grit then use **Factory Finish Rough Buff by Brunswick** to restore the original factory finish on rough buff balls. For dull balls, wet sand with the Micro Pad grit listed on the product information sheet.

3. If there is a visible track on your ball, have your pro shop use a Haus or similar resurfacing machine to remove the track then restore the ball to its original factory finish. This service is available, for a fee, at many pro shops.

4. If your ball has more than 50 games on it, you may be able to increase mid-lane and back-end hooking action by removing oil from the coverstock. Remove the oil from the ball by gently warming it with either the **Revivor** or **Rejuvenator** pro shop devices that have been designed for this purpose. The service is available, for a fee, at many pro shops. Brunswick testing has shown that by combining the restoration of the factory finish, resurfacing of the track and oil removal, your Brunswick ball can maintain its original "out of the box" reaction for hundreds of games. **Do not use a home oven to remove oil. Temperatures cannot be adequately controlled and the ball may crack.**

5. Absorbent materials sold by other bowling ball manufacturers to remove oil can also be used on Brunswick bowling balls. Information to date seems to indicate that absorbent materials have a more limited ability to remove oil than warming. You may be disappointed with results on heavily oil soaked balls.

NOTE: Oil soaked balls tend to traction less in the oil and respond less to the dry boards on the lane. If you are matching-up using an oil soaked ball on wet/dry or broken down lane conditions, removing the oil from the ball will significantly change your match-up and possibly create undesirable over reactions.

For the most up-to-date product line information visit www.bowlwithbrunswick.com/balls.